


# *Cardinal* LOAD CELLS

## SERIES TSP - LOAD CELLS FOR BENCH APPLICATIONS

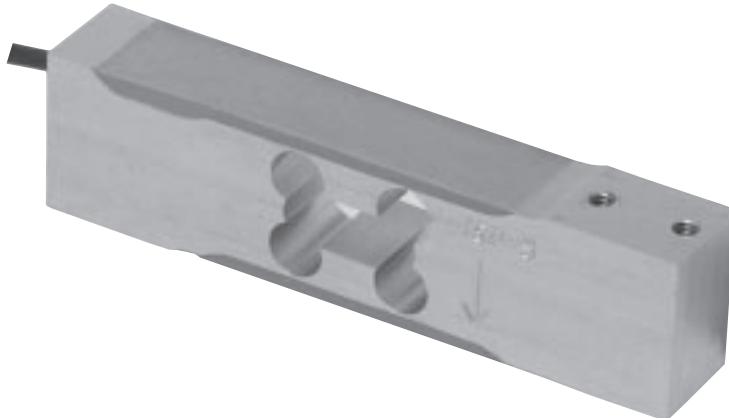

- **High performance and low cost**
- **Platform size up to 400mm x 400mm**
- **Anodized aluminum construction**
- **Moisture-proof barrier**
- **Integral mounting boss**
- **Low profile**
- **NTEP version available: TSP5**

The economically priced TSP is a high performance, low profile, single point load cell for use in platform and hanging scales, counting scales, hoppers and packaging scales, and a variety of other medical, industrial and process weighing applications.

The TSP single point load cell is easy to install and use and is interchangeable with most other load cells of its type. All critical components and wiring are encapsulated to protect against moisture and to insure stable operation of the TSP in harsh environments.

### SPECIFICATIONS

#### Mechanical Data

Rated Capacity, (R.C.)E <sub>max</sub> ..	5, 7, 10, 15, 20, 30, 50 &
	100 kg
Minimum Dead Load .....	2 kg
Safe Load Limit .....	150% R.C.
Ultimate Load .....	300% R.C.
Deflection at R.C. ....	0.2 mm
Spring Element Material .....	Aluminum
Net Weight.....	0.4 kg

#### Environmental Data

Temperature Compensation Range .....	-10° to +40°C
Operating Temperature Range ..	-25° to +50°C
Construction & Protection Code .....	CP-67 HU, IP67
Barometric Pressure Effect on Zero Load Output .....	<1 v (min)/1kPa

#### Electrical Data

Rated Output .....	2±0.1% mV/V
Excitation Voltage, Recommended .....	12 VDC
Excitation Voltage, Maximum .....	20 VDC
Cable Length .....	3m
Terminal Resistance	
Excitation .....	435 ±10 ohms
Signal .....	350 ± 5 ohms
Zero Load Output .....	± 1% R.C.
Insulation Resistance .....	>5000 meg ohms @ 50 VDC

#### Color Code

+ Excitation .....	Red
- Excitation .....	Black
- Signal .....	White
+ Signal .....	Green


#### Certificate Data

Issuing Body .....	NTEP <sup>1</sup> .....	OIML
Certificate Number .....	97-136 .....	R60/1991-DK-97.01
Accuracy Class .....	III .....	C
Maximum Number of Load Cell Intervals, n <sub>max</sub> ...	5000 .....	3000
Single/Multiple .....	S	
Humidity Symbol .....		CH
Minimum Load Cell Verification Interval V <sub>min</sub> .....	1.4, 2.1, 2.8, 4.2 g, .....	0.5, 0.7, 1, 1.5, 2.3 g
	7.0, 14.0 g .....	5 & 10 g

<sup>1</sup>Does not include TSP-5 kg and TSP-7 kg models.

# Cardinal

## SERIES TSP - LOAD CELLS FOR BENCH APPLICATIONS

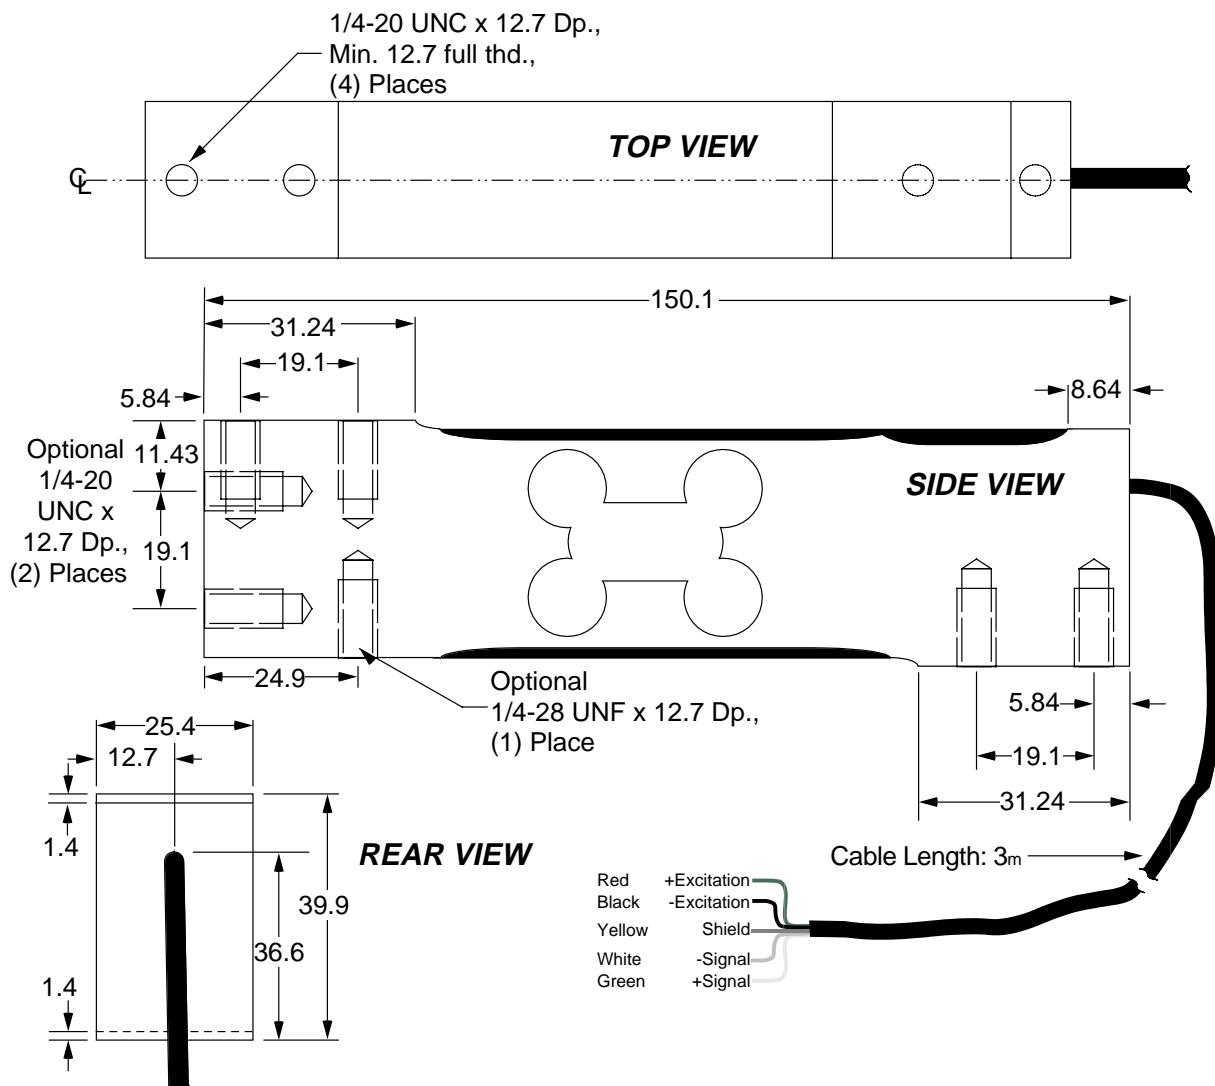

This Load Cell meet all requirements of OIML R60 and has been issued OIML certificate no. R60/1991-DK-97.01.


OIML

This Load Cell meet all requirements of Handbook 44, issued by the National Institute of Standards and Technology and have been issued the NTEP Certificate of Conformance No. 97-136.



Cardinal Scale reserves the right to improve, enhance and modify features and specifications without prior notice.

### ELECTRICAL INFORMATION

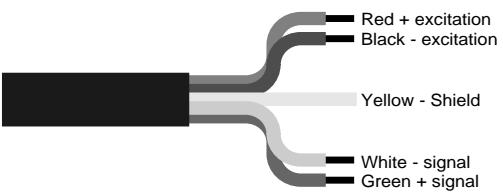

  
**Cardinal**  
Cardinal Scale Manufacturing Co.

Printed in USA • © Copyright 1999, Cardinal Scale Mfg. Company • 0201/263-10

AUTHORIZED DISTRIBUTOR  
ControlSystemsUSA.com - Houston, Texas USA  
sales@ControlSystemsUSA.com - 832-615-3588  
Bulletin 263-10